

Blackmagic Camera ProDock



Blackmagic Camera ProDock transforms your iPhone into a professional production camera with all the connections you need to build a custom rig. It also supports the Blackmagic Camera app for iPhone! You get connections for HDMI monitoring, mic, headphones, genlock, USB for external disks and power! With professional BNC connections, Blackmagic Camera ProDock supports external genlock and timecode to keep all your cameras in perfect sync. You get 3 USB-C ports so you can connect control accessories and external SSDs for recording, plus the power management will ensure everything can run at the same time.

\$325

Connections

HDMI Video Outputs

1 x HDMI 2.1 (Type A)
Outputs resolution and frame rate set in Blackmagic Camera for iOS.

Audio Inputs

1 x 3.5mm stereo mini-jack.

Audio Outputs

1 x 3.5mm stereo mini-jack.

Timecode Input

1 x BNC,
1 x 3.5mm audio input supports timecode in.

Genlock Input

1 x BNC, Tri-Sync or Black Burst.
Genlock supported on iPhone 17 Pro and iPhone 17 Pro Max.

USB-C Ports


2 x USB 3.2 high speed ports for recording to external media
1 x USB 2.0 port for accessories

Power

+12V to +15V DC input with locking 5.5mm barrel connector.

iPhone Connection

1 x USB-C cable and plug.

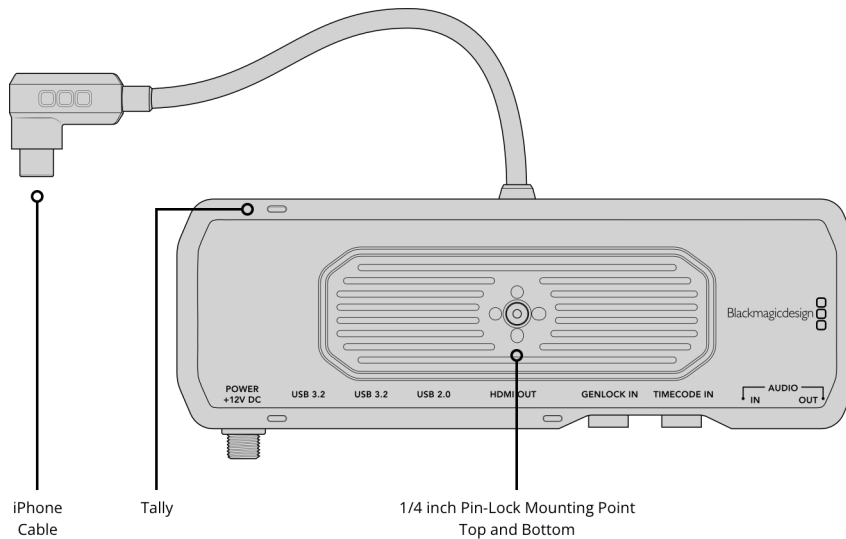

Audio

Microphone

Connect external microphones via the 3.5mm stereo mini-jack, or USB-C ports.

Monitor

Connect headphones via the 3.5mm stereo mini-jack audio output.

Media

Media

Record Blackmagic Camera clips to internal iPhone storage or external storage connected by USB.

Display

Status Indicator

1 x power LED indicator,
1 x front tally LED indicator,
1 x genlock LED indicator.

Software

Blackmagic Camera for iOS

Download for free on the App Store.



Operating System



Supported on iPhones running iOS 26 or later.

Genlock available on iPhone 17 Pro and iPhone 17 Pro Max models only.

Support for all other features available on iPhone 15 Pro, iPhone 15 Pro Max, iPhone 16 Pro, and iPhone 16 Pro Max models.

Power

Power Supply

1 x External 12V DC 60W power supply.

Power Inputs

+12V to +15V DC input with locking 5.5mm barrel connector.

Power Outputs

5V $\pm$ 1.5A 7.5W max output each USB-C port.

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 45°C (-4° to 113°F)

Relative Humidity

0% to 90% non-condensing

What's Included

Blackmagic Camera ProDock

1/4 inch to 1/4 inch mounting adapter

External 12V DC power supply with locking connector and international socket adapters

Welcome wallet with QR code for software download

Warranty

Product Warranty

1 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller