

# **SmartView Duo**



Featuring two large independent 8 inch LCD screens in a compact rack mount design, SmartView Duo handles SD, HD and 3Gb/s SDI video standards. SmartView Duo is perfect for post production, broadcast and live event monitoring. For easy setup, all screens can be remotely adjusted via ethernet connection. With SmartView Duo you can install SDI monitoring everywhere you need!

\$495

# Connections

#### SDI Video Input

Automatically switches between SD, HD and 3G-SDI. Reclocked loop through output.

#### Multi Rate Support

Auto detection of 2K, HD or standard definition inputs.

# Updates and Configuration


Via USB 2.0 high speed (480 Mb/s)

#### Ethernet

10/100 BaseT with loop through.

# Tally

9-pin D connector

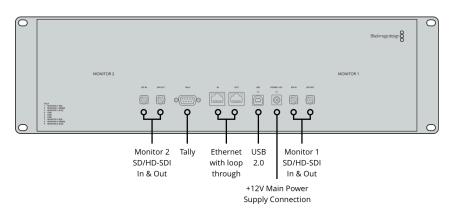

### Standards

#### **SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 424M Level B and SMPTE 425M.

#### SDI Color Space

REC 601, REC 709

## SDI Auto Switching

Automatically selects between SD, HD and 3 Gb/s SDI.

# Video Sampling

4:2:2 and 4:4:4

#### **SDI Format Support**

525i59.94 NTSC, 625i50 PAL 720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60

#### 2K Format Support

2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

Software

## Internal Software Upgrade Via included firmware updater software.

SmartView Utility Software Via USB or Ethernet.

# Operating Systems



Mac 10.15 Catalina, Mac 11.1 Big Sur or later.



Windows 10, 64-bit.

atalina,

# Display

**Display Element** TFT Active Matrix LCD.

**Display Resolution** 800 x 480 pixels Response < 15 ms

**Contrast Ratio** Typically 500:1 **Color Depth** 16.7 Million Colors.

**Display Orientation** Displays can rotate upside down for optimum viewing angle.

# Power Requirements

## **Power Supply**

12V universal power supply included with international socket adapters for all countries.

#### **Power Consumption**

< 20 Watts

**Operational Voltage Range** 12V - 15V

# Physical Specifications



# **Environmental Specifications**

**Operating Temperature** 

0° to 40° C (32° to 104° F)

**Storage Temperature** -20° to 45° C (-4° to 113° F) **Relative Humidity** 0% to 90% non-condensing

What's Included

SmartView Duo Power Supply Welcome wallet with QR code for software download

# Warranty

12 Months Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy

Blackmagic Design Authorized Reseller